

Flexible Wallwasher

2024 V1

Shenzhen Resolumin Lighting Technology Co.,Ltd

ADD:#16 Zhulongtian 4th ShuiTian Industrial Zone,ShiYan Street,Bao'An District,Shenzhen

Tel:+86 136 1306 0951

Website:www.resolumin.com

E-mail:tracy@resolumin.com (Product Manager)

Resolight[®]

Series

Flexible Wallwasher

01

Silicone

RSW-S2628-4~5/RSW-S1616-6~7

02

PU

RSW-PU2212

03

Joint Series

Joint 1





RSW-S2628



Features

- 
Salt Spray Resistance
- 
RGB & RGBW
- 
Anti-UV
- 
Ozone Resistance
- 
IK08
- 
Tunable White
- 
Thermal Shock
- 
3 SDCM
- 
IP67


Dimension

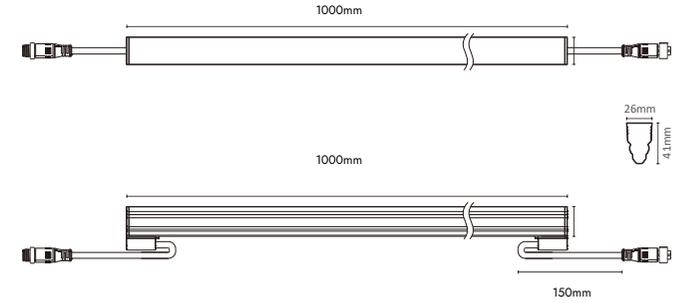


Specifications

Model	Voltage	LED/Type	Cutting Unit	LED Qty	Control/IC	CCT	Power (W/M)	Luminous Flux	Efficacy	CRI
S1	DC24V	3030SMD	Customized	24 Leds/m	CV		24 W/m	1800 lm/m	75 lm/w	Ra 80
TW	DC24V	3030SMD	Customized	24 Leds/m	DALI/CV		24 W/m	1560-1800 lm/m	65-75 lm/w	Ra 80
RGBCW	DC24V	3030SMD	Customized	24 Leds/m	UCS512H4		24 W/m	600-1800 lm/m	25-75 lm/w	Ra 80
RGB	DC24V	3030SMD	Customized	24 Leds/m	UCS512H4		24 W/m	600-1800 lm/m	25-75 lm/w	/
RGBW	DC24V	3035SMD	Customized	24 Leds/m	UCS512H4		24 W/m	672-1920 lm/m	28-80 lm/w	Ra 80


Beam Angle




Bending Way

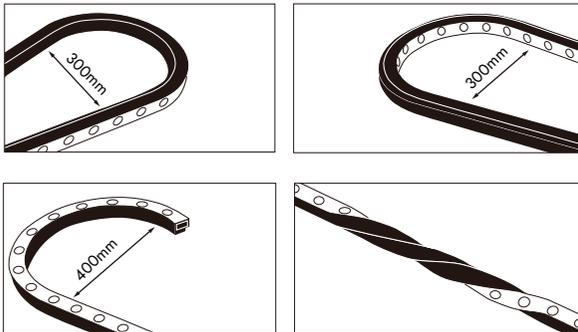

Install



Mounting Profile



Connection Method



Silicone Male and Female Waterproof Terminal Wire



RSW-S1616



Features

- 
Salt Spary Resistance
- 
RGB & RGBW
- 
Anti-UV
- 
Ozone Resistance
- 
IK08
- 
Tunable White
- 
Thermal Shock
- 
3 SDCM
- 
IP67


Dimension

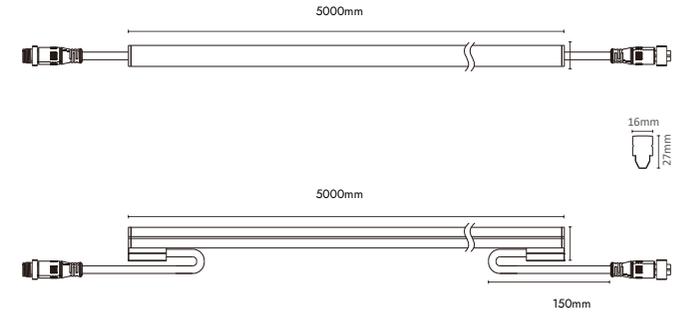


Specifications

Model	Voltage	LED/Type	Cutting Unit	LED Qty	Control/IC	CCT	Power (W/M)	Luminous Flux	Efficacy	CRI
S1	DC24V	2835SMD	CUSTOMIZED	48Leds/m	CV	2700K 3000K 4000K 6000K R G B	15 W/m	1200 lm/m	80 lm/w	Ra 80
RGB	DC24V	3030SMD	CUSTOMIZED	48 Leds/m	UCSS12C1L	R G B + 	15 W/m	300-900 lm/m	20-60 lm/w	/


Beam Angle




Bending Way

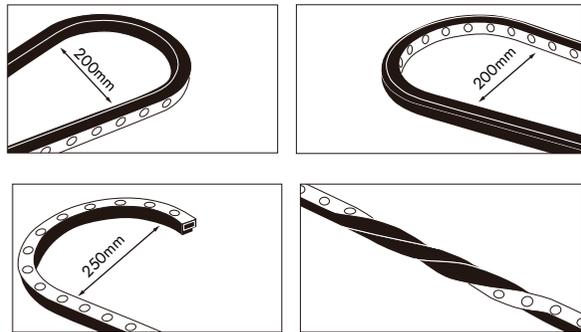


Install



Mounting Profile




Connection Method

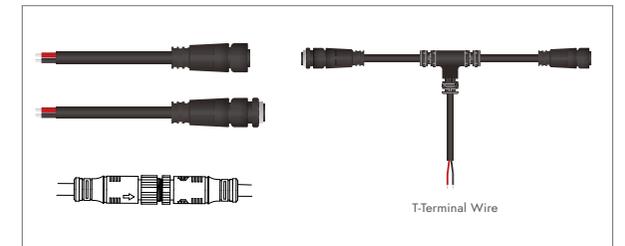

Silicone Male and Female Waterproof Terminal Wire

PU

PU Material IP68 waterproof, designed for sea water immersion using, such as shipyards, cruise ships, yachts, cargo ships or the navy

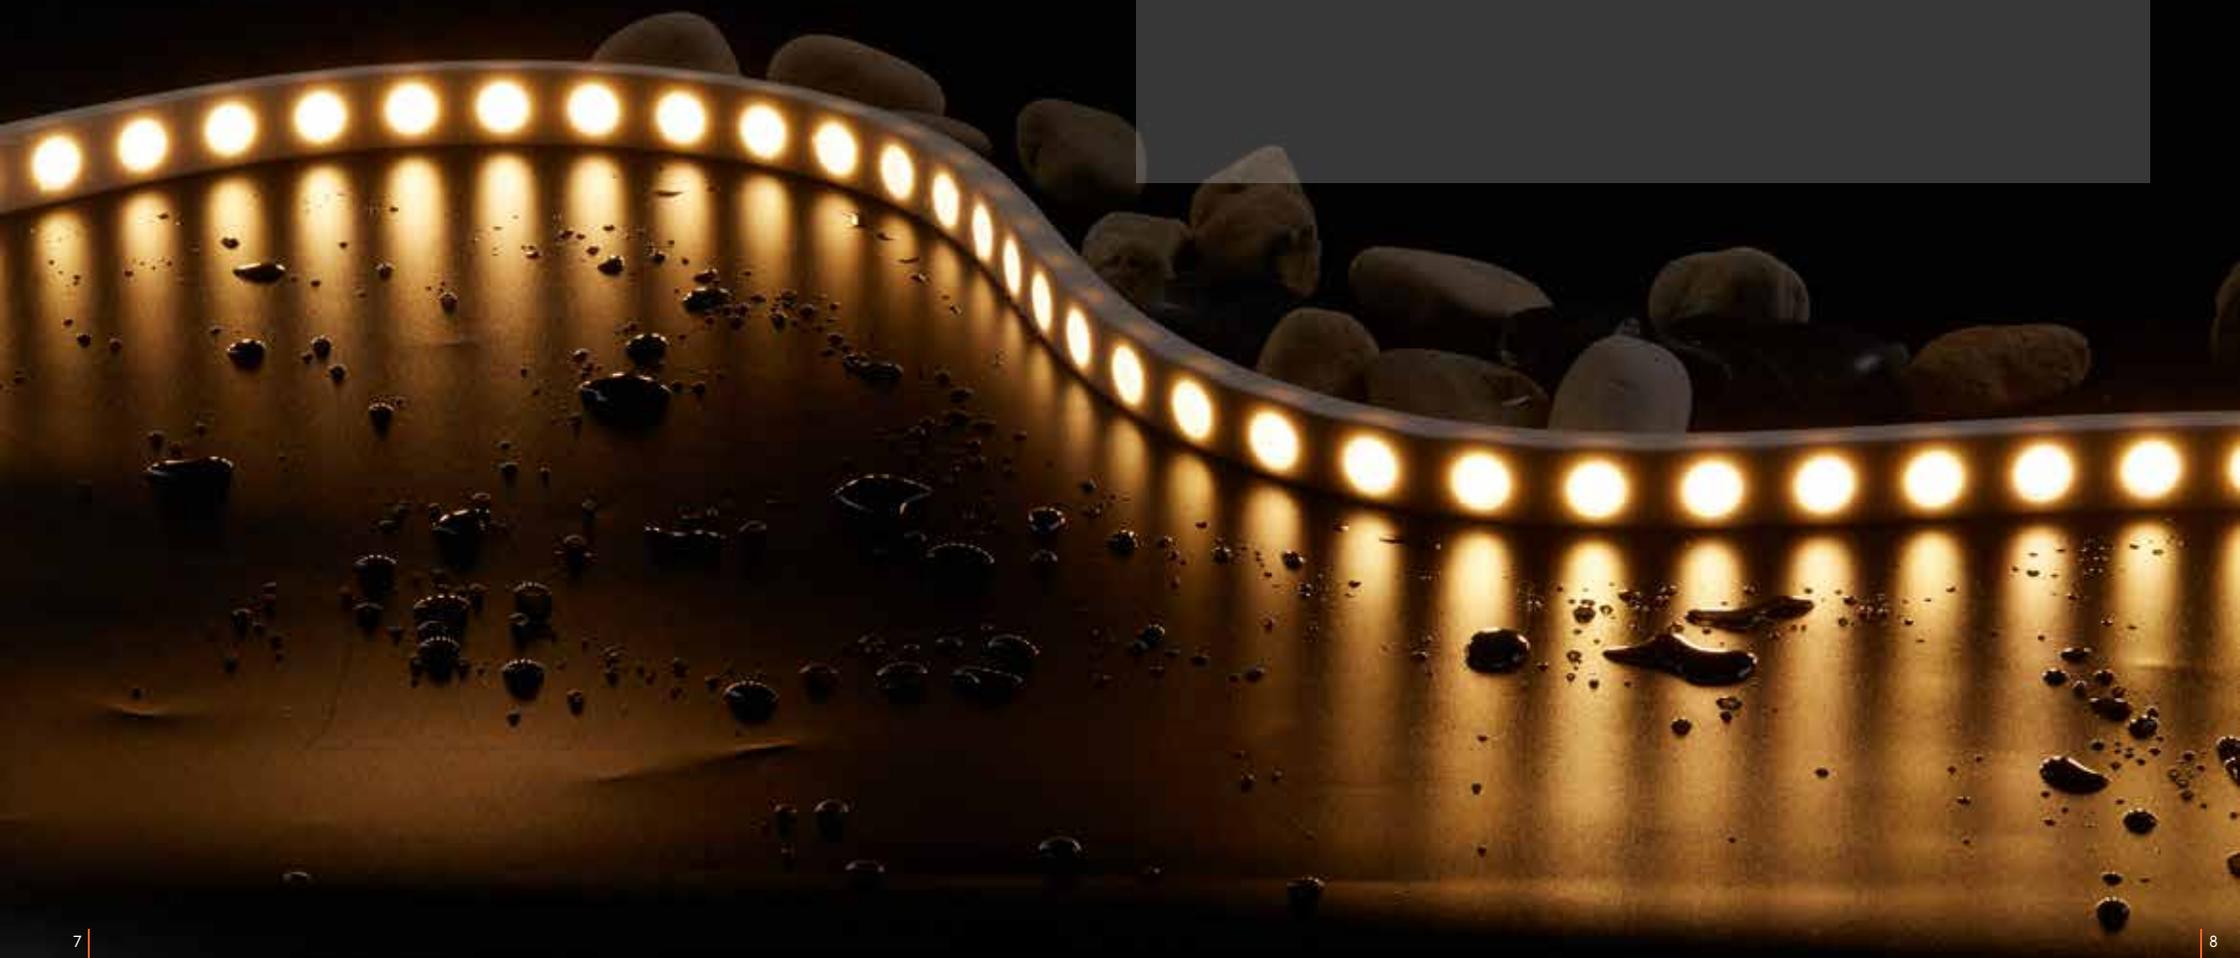



RSW-PU2212



Features

-  Salt Spray Resistance
-  RGB & RGBW
-  Anti-UV
-  Ozone Resistance
-  IK08
-  Tunable White
-  Thermal Shock
-  3 SDCM
-  IP68


Dimension

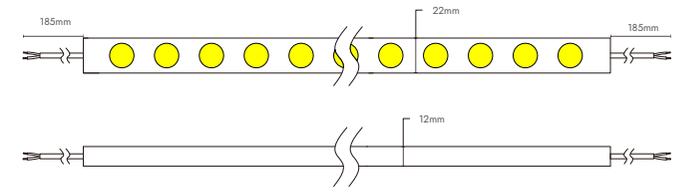


Specifications

Model	Voltage	LED/Type	Cutting Unit	LED Qty	Control/IC	CCT	Power (W/M)	Luminous Flux	Efficacy	CRI
S1	DC24V	2835SMD	CUsomized	36 Leds/m	CV	2700 K 3000 K 4000 K 6000 K	18 W/m	1200-1550 lm/m	65-86 lm/w	Ra 90


Beam Angle

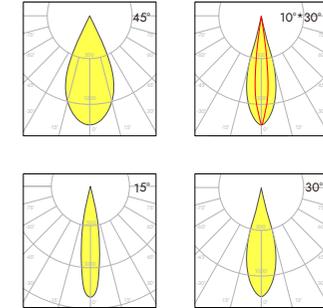

Bending Way

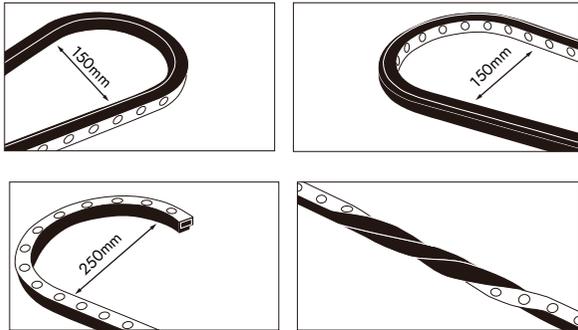


Install




Various Cable Entry



Angle adjustable Bracket

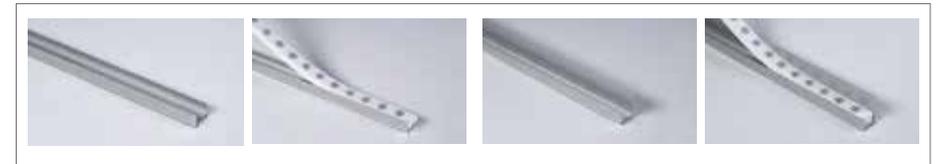

Aluminum Profile(No baffle/With baffle)

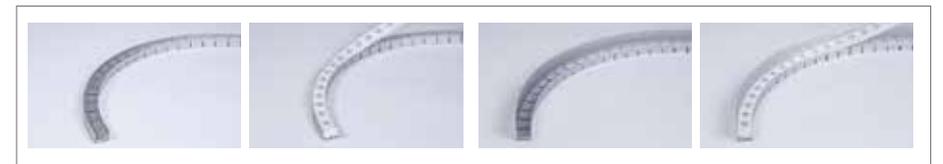

Flexible Aluminum Profile(No baffle/With baffle)

Joint Series

Aluminium heat sink as main body, silicone wiring connecting, 1W per LED, better heat dissipation



Joint 1



Features



Salt Spary Resistance



RGB & RGBW



Anti-UV



Ozone Resistance



IK08



Thermal Shock




3 SDCM




IP67

Dimension








22.5mm(W)*29mm(H)

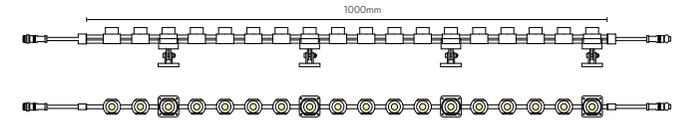


Specifications

Model	Voltage	LED/Type	Cutting Unit	LED Qty	Control/IC	CCT	Power (W/M)	Luminous Flux	Efficacy	CRI
J1S1	DC24V	3030SMD	50mm	18 Leds/m	CV	2700 K 3000 K 4000 K 6000 K R G B	18 W/m	720 lm/m	40lm/W	Ra 80


Beam Angle




Bending Way

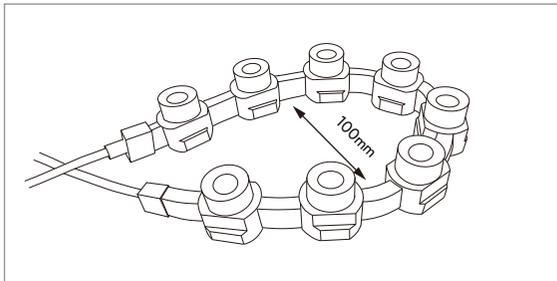

Install



Mounting Profile

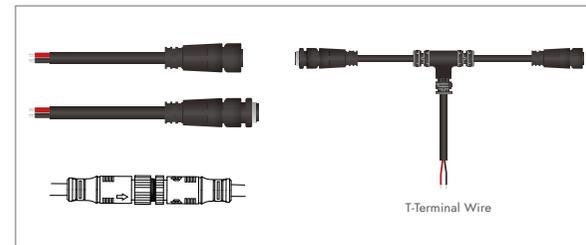

IP67 Male and Female Waterproof Terminal Wire